



# TX RX Systems

## Universal Remote Annunciator

1/5/2024

### Public Safety Remote Annunciator

DS39368-1

#### Product Features

- Works with any BDA/BBU with relay closures
- Compact, attractive form-factor
- Audible alert on the RA
- Audible function can be disabled
- Powered by 24 to 48VDC from BBU
- Monitors for circuit faults between IU and RA
- Supports up to 8 input alarms
- Provides 7 NO and NC output relays
- IU includes summary alarm contact
- Up to 3000 ft distance between IU and RA
- NEMA 4 conduit fittings included on IU
- Diagnostic indicators on IU



#### Model Ordering

Part Number	Description
<b>95-ANC-REMOTE</b>	<b>Single Unit Remote Annunciator Panel</b>
<b>95-ANC-NFPA</b>	<b>Universal Interface Annunciator Kit (Interface Unit plus 1 Remote Annunciator)</b>




## Electrical Specifications

Operating Voltage	24 or 48VDC
Power Draw	4W Max
Communications Link	Serial Data
Max distance UI to RA	3000 ft

## Interface Unit PCB Connections

- |                            |                        |
|----------------------------|------------------------|
| 4. Status Indicator Lights | 1. Alarm Relay Outputs |
| 5. Mute Button             | 2. DC Input            |
| 6. Annunciator Jack        | 3. Inputs BDA / BBU    |

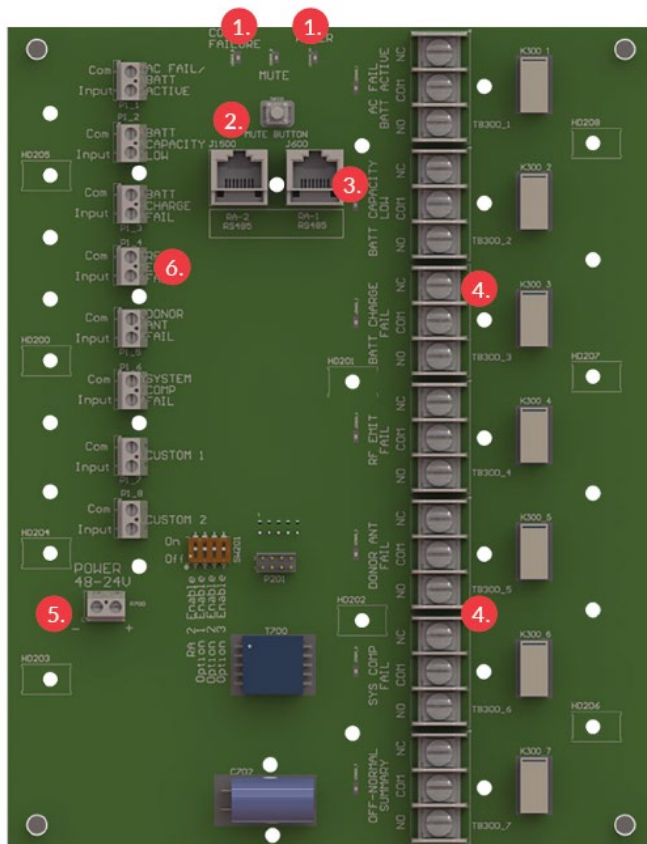

## Interface Unit Mechanical Specifications

Dimensions (H x W x D)	11.75" x 8.7" x 2.6"
Weight	6.2 lbs
Mounting	Wall Mountable
Feedthroughs	2 Each ¾", 1 Each ½" Conduit
Weatherproofing	NEMA Type 4, Listed to UL 508A

### Connectors

Alarm Inputs	Compression Screw Terminals
Alarm Outputs to FACP	Screw Terminals
To remote annunciator	RJ45 Jack

## Remote Annunciator Mechanical Specifications

Dimensions (H x W x D)	6.1" x 5.1" x 1.1"
Weight	1.5 lbs
Mounting	2 Gang Electrical Box
Weatherproofing	NEMA Type 1

**Connectors**

To Interface Unit	RJ45 Jack
-------------------	-----------