



TX RX Systems

Universal Remote Annunciator


1/5/2024

Public Safety Remote Annunciator

DS39368-1


Product Features

- Works with any BDA/BBU with relay closures
- Compact, attractive form-factor
- Audible alert on the RA
- Audible function can be disabled
- Powered by 24 to 48VDC from BBU
- Monitors for circuit faults between IU and RA
- Supports up to 8 input alarms
- Provides 7 NO and NC output relays
- IU includes summary alarm contact
- Up to 3000 ft distance between IU and RA
- NEMA 4 conduit fittings included on IU
- Diagnostic indicators on IU

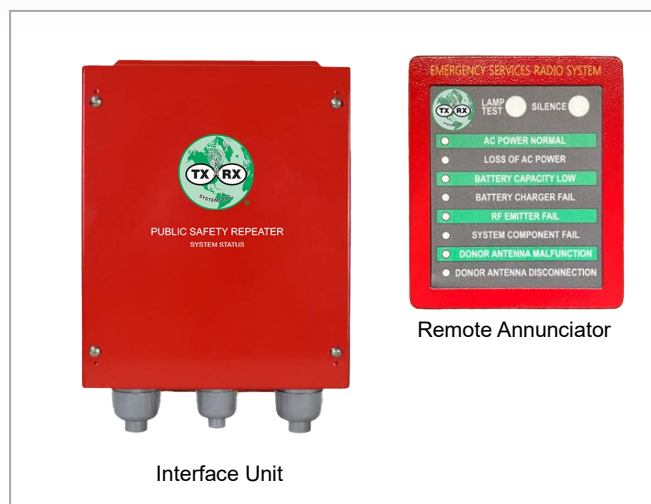

Model Ordering

Part Number	Description
95-ANC-REMOTE	Single Unit Remote Annunciator Panel
95-ANC-NFPA	Universal Interface Annunciator Kit (Interface Unit plus 1 Remote Annunciator)

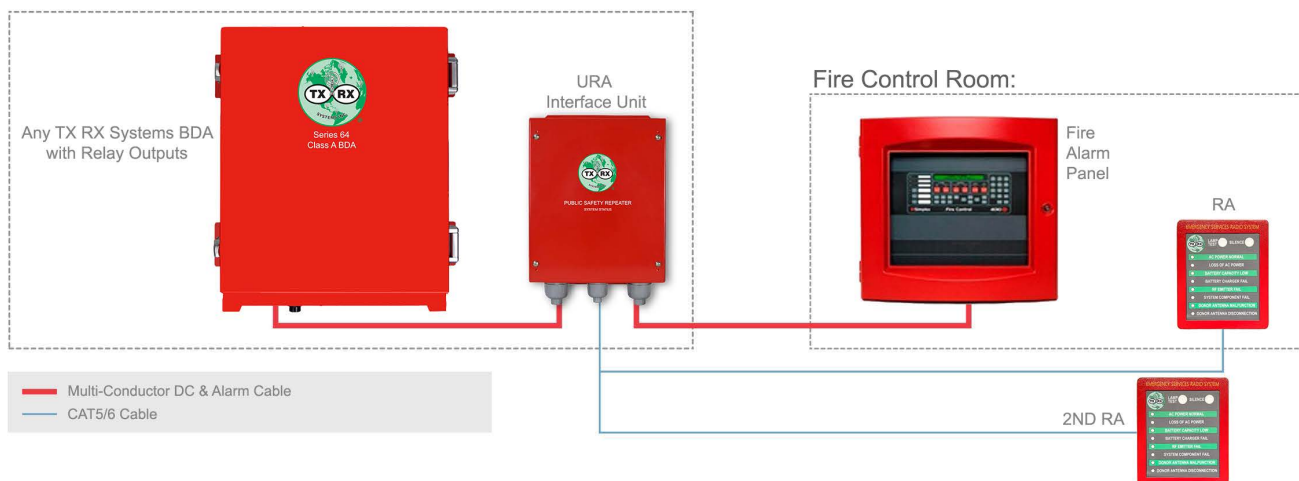


Electrical Specifications

Operating Voltage	24 or 48VDC
Power Draw	4W Max
Communications Link	Serial Data
Max distance UI to RA	3000 ft

Interface Unit PCB Connections

- | | |
|----------------------------|------------------------|
| 4. Status Indicator Lights | 1. Alarm Relay Outputs |
| 5. Mute Button | 2. DC Input |
| 6. Annunciator Jack | 3. Inputs BDA / BBU |

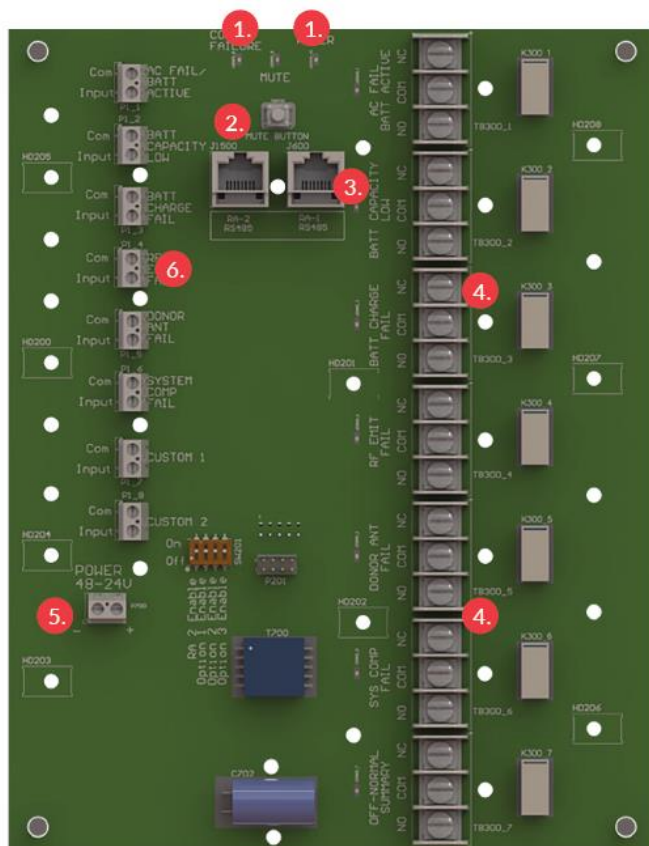

Interface Unit Mechanical Specifications

Dimensions (H x W x D)	11.75" x 8.7" x 2.6"
Weight	6.2 lbs
Mounting	Wall Mountable
Feedthroughs	2 Each ¾", 1 Each ½" Conduit
Weatherproofing	NEMA Type 4, Listed to UL 508A

Connectors

Alarm Inputs	Compression Screw Terminals
Alarm Outputs to FACP	Screw Terminals
To remote annunciator	RJ45 Jack

Remote Annunciator Mechanical Specifications

Dimensions (H x W x D)	6.1" x 5.1" x 1.1"
Weight	1.5 lbs
Mounting	2 Gang Electrical Box
Weatherproofing	NEMA Type 1

Connectors

To Interface Unit	RJ45 Jack
-------------------	-----------